


IJ-40, IJ-50, IJ-60, WJ65, WJ95, WJ110: Loading Rates From Memory Card


1. Press the "Lock" button.



2. Press the button below "Supervis".

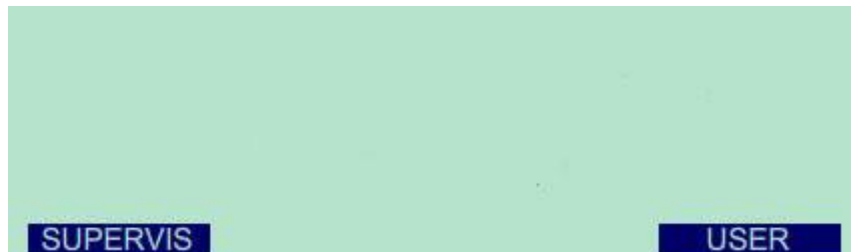

3. Enter the Supervisor PIN Code, 9430.

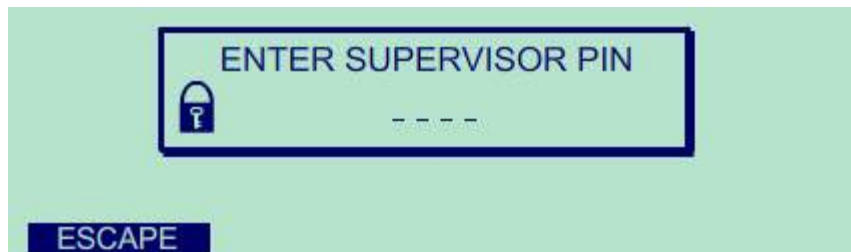

4. Using the down arrow button, highlight LOAD FROM MEMORY CARD.
- Press OK.



5. Insert the memory card with the model numbers facing up into the slot on the side of the machine.
- Press OK.



6. The rate to be loaded will be displayed on the screen.

- Check [Latest Rate File versions](#) to view the list of rate file versions .
- Press OK.




7. The mailing machine will prompt to replace the previous rate file.


- Press OK.



8. Wait for the new rates to load.

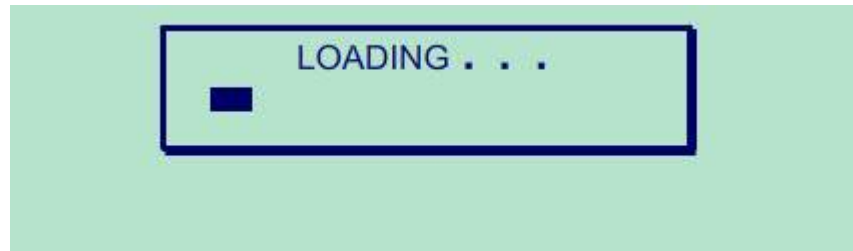

9. When the new rates have been loaded, the mailing machine will display LOAD FROM MEMORY CARD LOADING COMPLETE.

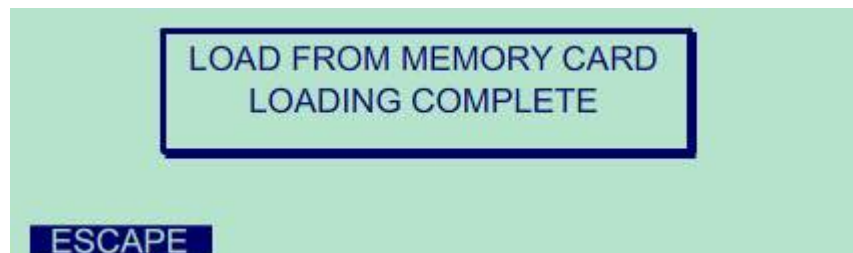

10. The new rates have been successfully loaded.

- Remove the Rate Card from the mailing machine.
- Press the LOCK button to exit supervisor mode.
- The new rates will not become active until the carrier specified effective date.

The Default Postage Value may need to be changed after the rates are active.