

IJ-65, IJ-75, IJ-85, WJ135, WJ180, WJ215: Loading Rates From Memory Card

1. Press the “Lock” button.




2. Press the button below "Superv".



3. Enter the Supervisor PIN Code.



4. Press the button below NEXT.

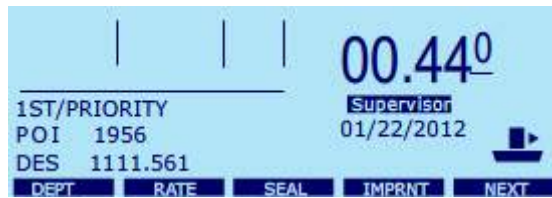


5. Press the button below SETUP.




6. Press the down arrow button until LOAD RATE is highlighted.


- Press OK.

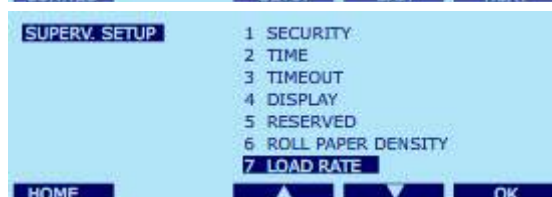

7. The rates will load.

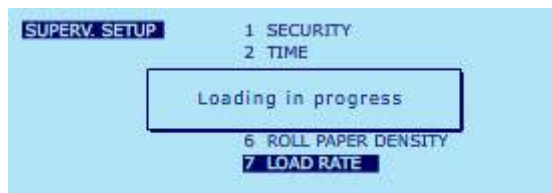

8. Press the OK button.

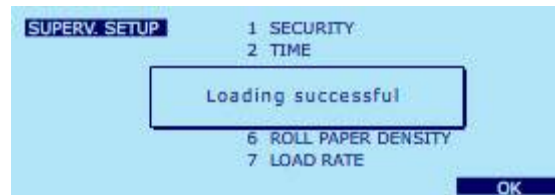

9. The new rates have been successfully loaded.

- Remove the Rate Card from the mailing machine.
- Press the LOCK button to exit supervisor mode.
- The new rates will not become active until the carrier specified effective date.

The Default Postage Value may need to be changed after the rates are active.

NOTE: On the effective date, the screen will display 'Update the rate configuration'. It is important to press OK when asked to update the rate. If you do not, the new rate will not take effect.